



HYC-85GD

Pharmacy Refrigerator

Scope of Application:

Applicable to pharmacies, pharmaceutical factories, quarantine stations, health centers and hospitals, used to store biological products and those need to be stored at a temperature between 2-8°C .



Purpose-built: Medical Grade Refrigerator



High Performance: Temperature Uniformity $\leq \pm 0.7^{\circ}\text{C}$



Low Energy Consumption: 0.99 kWh/day
Low Noise: 35dB(A)



Reversible Door Hinge

Qingdao Haier Biomedical Co.,Ltd.

No.280 Feng Yuan Road, High-tech Zone,
Qingdao, 266109, P.R. China
Tel: +86-0532-88935593
Website: www.haiermedical.com



Haier Biomedical
International



Haier Biomedical
International



@haiermedicalint



Haier Biomedical
International



Haier Biomedical
International



HYC-85GD is an on/under counter Pharmacy Refrigerator. Superior performance, upgraded configuration and simple appearance.



Product Advantages

-  Three-layer tempered glass door, filled with inert gas, low-E film to effectively reduce the risk of condensation
-  When the power is off, the panel displays & alarm function can last up to 24 hours
-  Large capacity: 85L
-  Hermetically sealed compressor, forced-air circulation and automatic defrost to ensure high cooling performance
-  Standard overcurrent protector, optional USB interface, RS485 interface
-  Temperature uniformity $\leq \pm 0.7^{\circ}\text{C}$

Appearance

- Integrated glass control panel display, easy to operate and clean
- Built-in door handle, the door is openable right-and-left
- Three-layer tempered glass door, filled with inert gas, low-E film to effectively reduce the risk of condensation

Product Parts

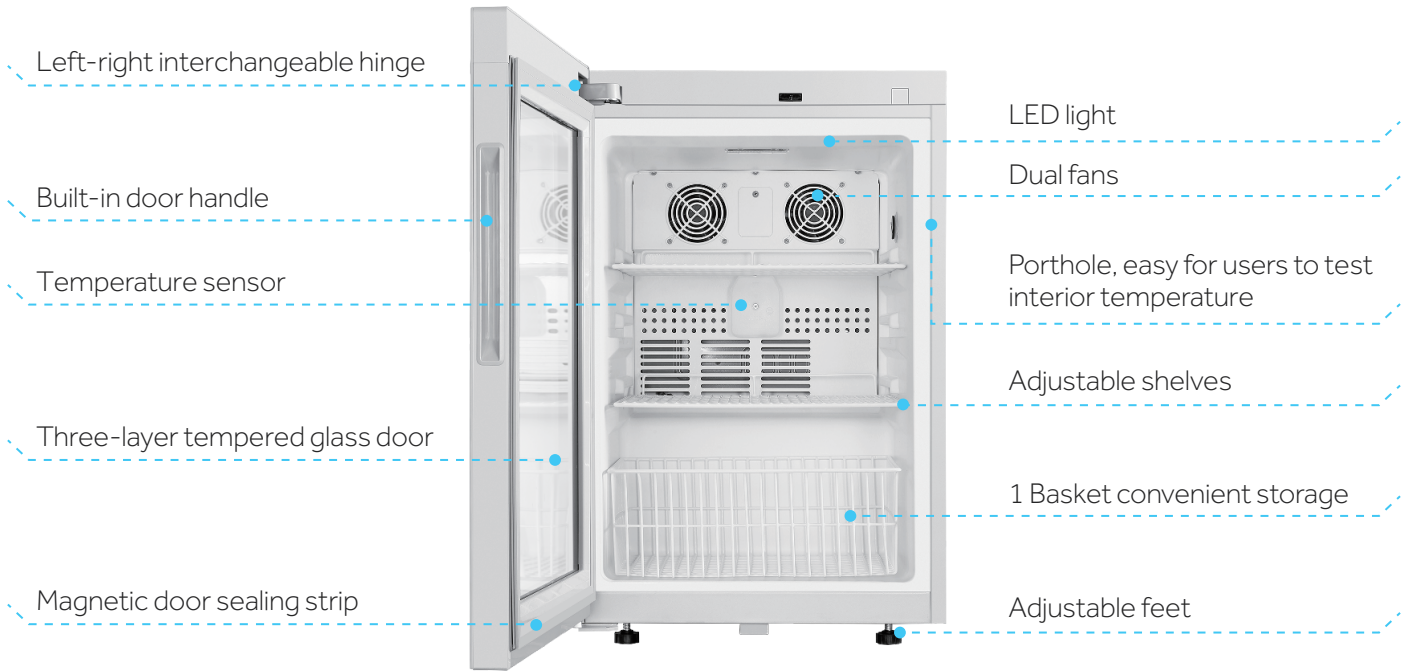

Dual fans
High efficiency, good uniformity



Integrated glass control panel display, concise and easy



Three-layer tempered glass door, filled with inert gas in the middle, low-E film to effectively reduce the risk of condensation



Bionic temperature sensor
Simulate the temperature of stored articles



Energy saving LED light



Optional USB interface to store the temperature data for up to 10 years




Optional RS485 interface, easy for users to monitor the equipment remotely



Porthole
Easy for users to test interior temperature



Energy-efficient conversion compressors for more effective cooling

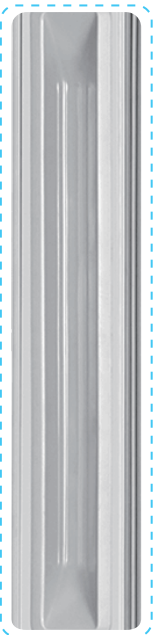

Built-in door handle, easy to clean

Specifications

Model		HYC-85GD	
Technical Data	Cabinet Type	Table-top/Under-counter	
	Climate Class	N, 16-32°C	
	Cooling Type	Forced air circulation	
	Defrost Mode	Auto defrost	
	Refrigerant	R600a	
	Sound Level (dB(A))	35	
Performance	Temperature Range (°C)	2-8	
Control	Controller	Microprocessor	
	Display	Digital	
Electrical Data	Power Supply (V/Hz)	220-240/50	
	Power (W)	90	
	Electrical Current (A)	1.2	
	Power Consumption (kWh/day)	0.99	
Dimensions	Capacity (L/Cu.Ft)	85	
	Net/Gross Weight (approx)	(kg)	36/41
	Interior Dimensions (W*D*H)	(mm)	405*405*555
	Exterior Dimensions (W*D*H)	(mm)	495*550*740
	Packing Dimensions (W*D*H)	(mm)	570*630*810
	Container Load (20'/40'/40'H)	74/152/228	
Alarms	High/Low Temperature	Y	
	Door Ajar	Y	
	Power Failure	Y	
	Low Battery	Y	
	Sensor Error	Y	
	Communication Failure	Y	
	Remote Alarm	Y	
Accessories	Roller	2	
	Foot	2	
	Porthole	1	
	Shelves/Baskets	2/1	
	Printer	N/A	
	USB Interface	Optional	
	RS485	Optional	
Other	CE	Coming soon	

*Haier Biomedical reserves the right to change products and specifications without prior notice.