



HYC-309

Pharmacy Refrigerator

Scope of Application :

The product is used to store biological drugs and items at a temperature of 2-8°C. Typically used within pharmacy, pharma production, public health, hospitals and other life science laboratories.

Innovative Design

- Energy-efficient technology
- Superior performance
- Safe and reliable
- Frequency conversion compressor and green HC refrigerant
- Convenient to use

Haier Biomedical UK Ltd.

Ocean House, 121 Harris Way,
Sunbury, Surrey, TW16 7EL
Tel: (01932)780 070

Email: sales@haierbiomedical.co.uk
Website: www.haierbiomedical.co.uk



@HaierBiomedicalUK



Haier Biomedical UK



Haier Biomedical



@HaierBiomedical

Product Advantages



Superior performance


- Microcomputer controller, display/control accuracy 0.1°C
- Temperature range 2-8°C, temperature uniformity $\pm 2^\circ\text{C}$
- Energy-efficient conversion compressors and non-toxic, environmentally-friendly hydrocarbon refrigerant
- Self-closing door design
- Electrically heated glass door prevents condensation
- Multiple interface options - USB, RS485 and printer



Safe and reliable

- Key lock and provision for padlock to ensure safe and secure product storage
- Multiple alarms: High/Low temperature alarm, high ambient temperature alarm, door ajar alarm, power failure, low battery, sensor error, comms error and remote alarm contacts.
- Alarm mode: Audible/visual and remote alarm with battery back-up which continuously alarms for up to 48 hours in the event of a power failure


Product Parts Diagram

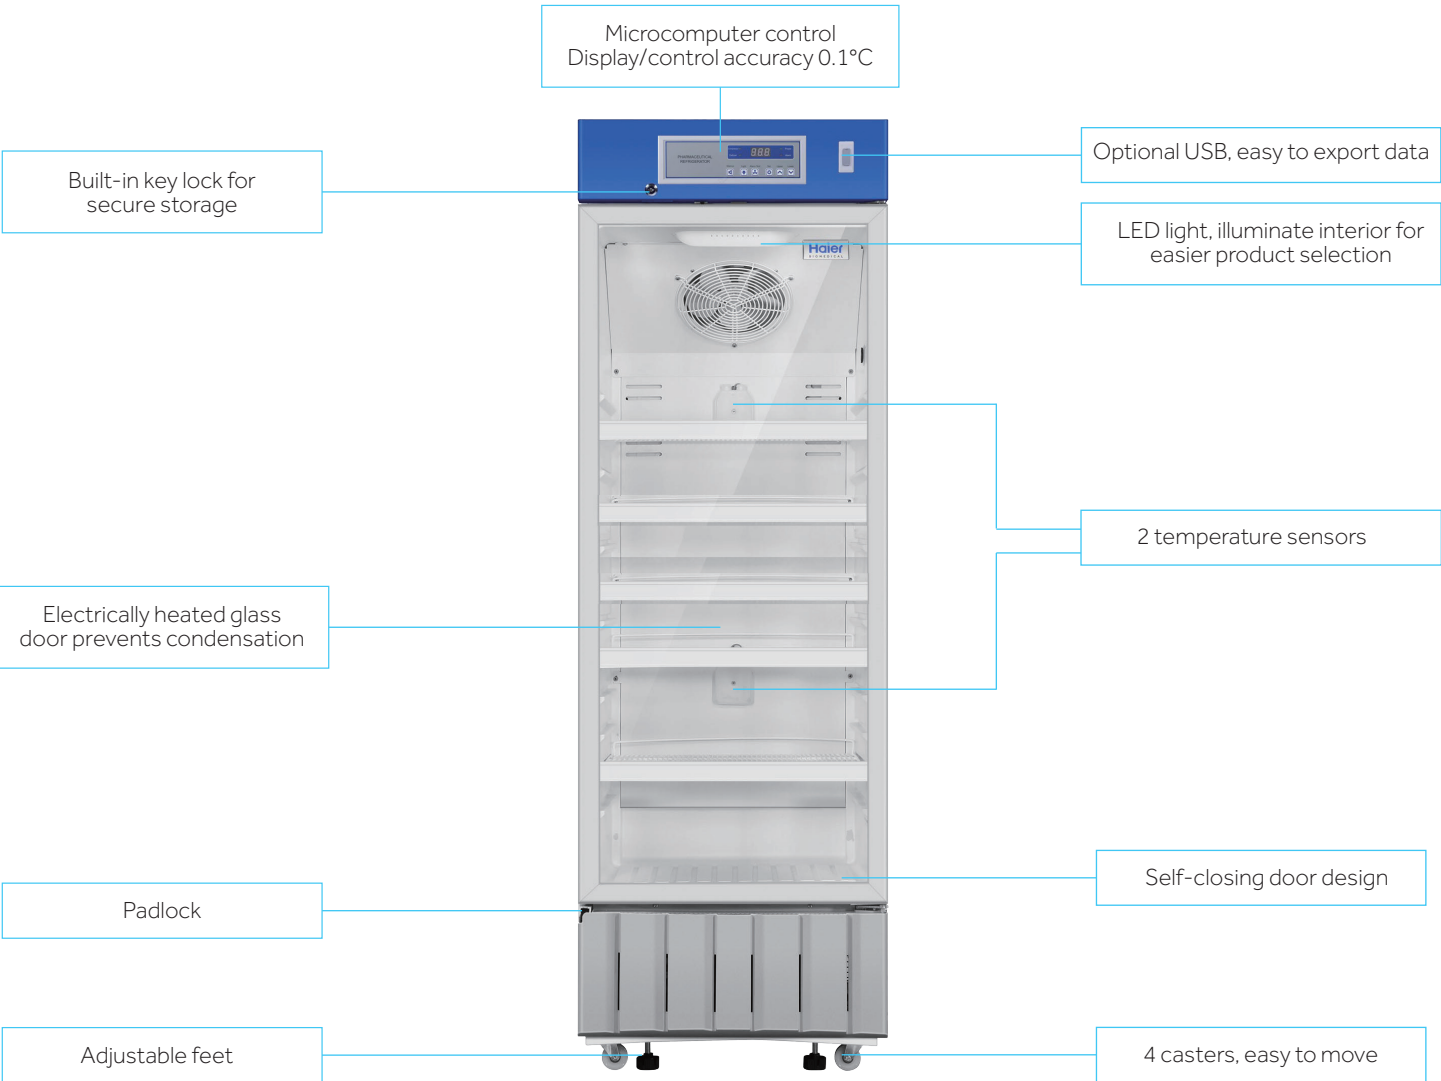


Temperature Curve



Cool Down Curve at 32°C Ambient temperature

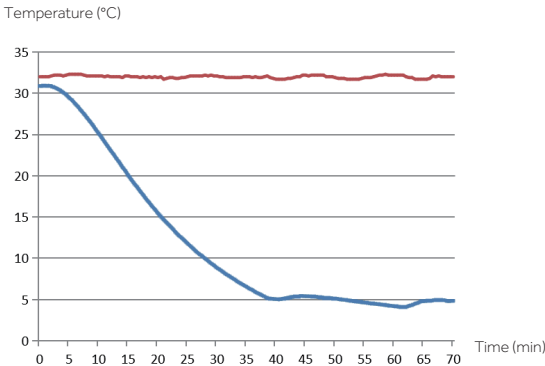


Stability Curve at 32°C Ambient temperature

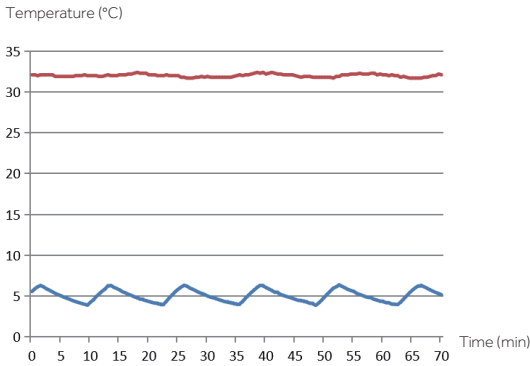

— Ambient Temperature
— Internal Temperature

Product Dimension Drawings

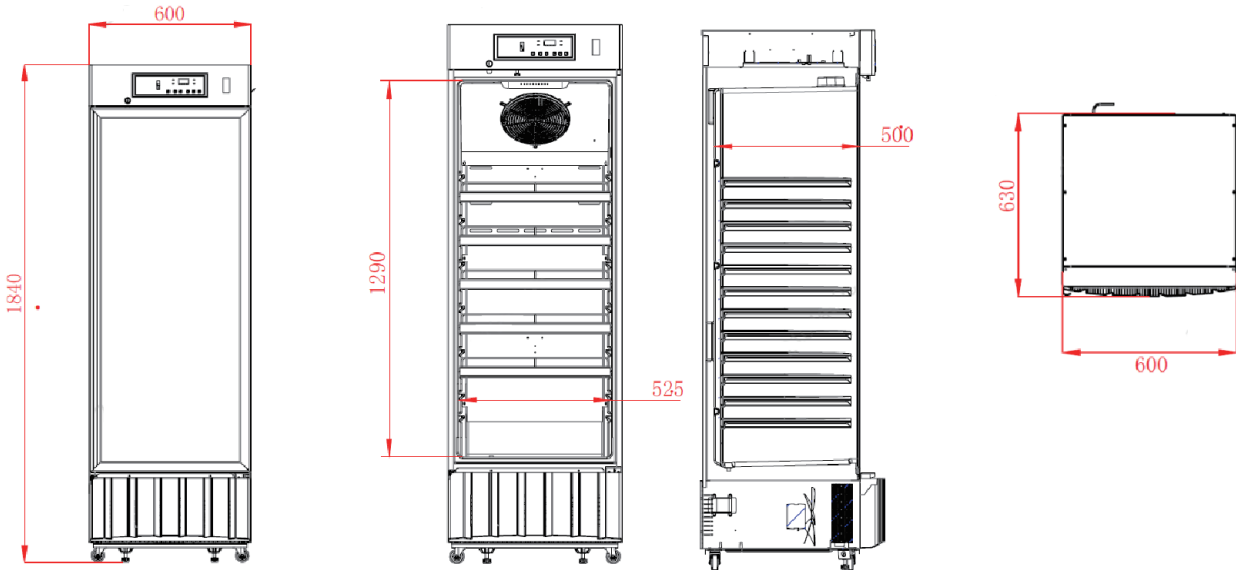



Model		HYC-309	
Technical Data	Cabinet Type	Upright	
	Climate Class	N	
	Cooling Type	Forced air cooling	
	Defrost Mode	Auto	
	Refrigerant	HC	
	Sound Level (dB(A))	41	
Performance	Temperature Range (°C)	2-8	
Control	Controller	Microprocessor	
	Display	LED	
Electrical Data	Power Supply (V/Hz)	220-240/ 50/60	
	Electrical Current (A)	1.9	
Dimensions	Capacity (L/Cu.Ft)	309/10.91	
	Net/Gross Weight (approx)	kg	77/87
		lbs	169.76/191.80
	Interior Dimensions (W*D*H)	mm	525*500*1290
		in	20.67*19.69*50.79
	Exterior Dimensions (W*D*H)	mm	600*630*1840
		in	23.62*24.80*72.44
	Packing Dimensions (W*D*H)	mm	660*670*2060
in		25.98*26.38*81.10	
Container Load (20'/40'/40'H)		24/48/48	
Alarms	High/Low Temperature	Y	
	High Ambient Temperature	Y	
	Door Ajar	Y	
	Power Failure	Y	
	Low Battery	Y	
	Sensor Error	Y	
	Communication Failure Alarm	Y	
	Remote Alarm	Y	
Accessories	Caster	4	
	Foot	2	
	Porthole	1	
	Shelves/Drawers	5/-	
	Printer	Optional	
	USB Interface	Optional	
	RS485	Optional	
Others	Certification	CE	

*Haier Biomedical reserves the right to change products and specifications without prior notice.